

EXHIBIT A: DESIGN DRAWINGS

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY



RENDERING SHOWS VIEW OF PROPOSED ABOVE GROUND ENTRANCE PAVILION IN THE WEST QUADRANT OF SHERMAN PARK + STAFF SCREENING / EXIT BUILDING ALONG EAST EXEC. AVE.


2. WHITE HOUSE VISITOR SCREENING FACILITY

2.1 EXISTING CONDITIONS

The project site consists of two distinct zones separated by Pennsylvania Avenue, with access provided from either Pennsylvania Avenue or E Street NW. Both entries are controlled by gates.

The northern zone is an approximately 47-foot by 185-foot linear strip bordered by the Treasury Building and its grounds to the east, East Executive to the west, and Pennsylvania Avenue to the south. The northern edge is bound by a bridge that runs over the Treasury Building's service ramp. A concrete walkway runs along the western edge of the site adjacent to East Executive. The eastern edge features a site wall that separates the project area from the service ramp leading to a Treasury Building's subgrade level. Existing vegetation includes a mix of mature deciduous trees and smaller ornamental trees; these trees must be removed prior to construction. The ground cover in this area, where not paved, is primarily mulch.

The southern zone is a nearly-rectangular memorial park, Sherman Plaza, measuring approximately 330 feet by 240 feet. Sherman Plaza is bound by 15th Street NW to the east, E Street NW to the south, Pennsylvania Avenue to the north, and East Executive to the west. The South Plaza of the Treasury Building lies across Pennsylvania Avenue. Mature deciduous trees are located along the perimeter of the plaza; many of those on the western portion of the site will need to be removed. In the center of the plaza, elevated on a pedestal, is the statue of General William Tecumseh Sherman. Walkways surround the pedestal and then radiate from the pedestal to the northeast, southeast, northwest, and southwest corners of the plaza; these walkways are incorporated into the site and landscape design. Sherman's statue along with the statue of Alexander Hamilton in the South Plaza and the statue of Albert Gallatin Treasury Building's north plaza, form a memorial axis, phenomenologically bounding the east of President's Park.

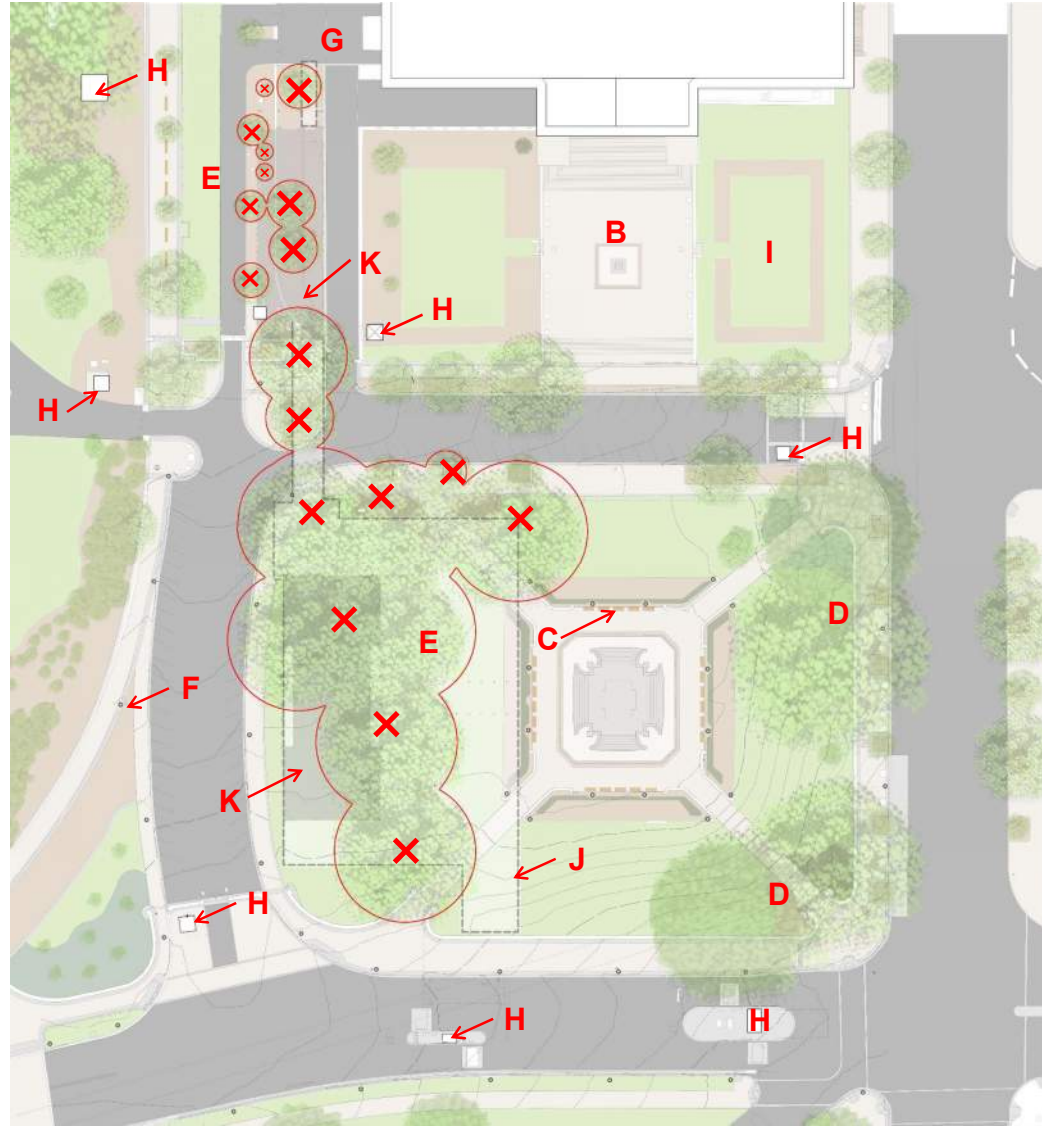

- A. EXISTING STATUE-
GENERAL WILLIAM
TECUMSEH SHERMAN
- B. EXISTING STATUE –
ALEXANDER HAMILTON
- C. EXISTING BENCHES,
TYPICAL
- D. EXISTING TREES TO
REMAIN
- E. EXISTING TREES TO
REMOVE
- F. EXISTING LIGHTING,
TYPICAL
- G. EXISTING BRIDGE –
FROM EAST EXECUTIVE
OVER SERVICE RAMP
- H. OFFICER POSTS
- I. EXISTING LAWN
- J. PROPOSED BUILDING
BELOW GROUND
- K. PROPOSED BUILDING
ABOVE GROUND

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

18 existing trees across the site are identified for removal to accommodate the project. The table to the right identifies the existing trees within the site and what the disposition of each will be, either save (S), transplant (TR) or remove (R).

Following NCPC Tree Preservation and Replacement Resource Guide (2020), the removal of the trees to accommodate the project will require 40 trees to be installed to mitigate the loss of existing trees..

SHERMAN SQUARE PARK TREE CONDITION REVIEW															
NPS TREE NO.	AECOM TREE NO.	TREE SPECIES	HABIT	CANOPY	TRUNK	TRUNK FLARE	OVERALL CONDITION	NOTES	DISPOSITION	DIAMETER DBH (IN.)	SPECIES RATING	CONDITION RATING	TREE REPLACEMENT SCORE	TREE REPLACEMENT REQUIREMENT	
1	1	AMERICAN ELM (ULMUS AMERICANUS)	G	F/G	G	G	G	CABLED	S	48	58%	75%			
2		REMOVED							N/A						
3	5	WILLOW OAK (QUERCUS PHELLOS)	F	G	F	F	F	SUCKERING	R	39	75%	50%	14.625	3	
4	6	WILLOW OAK (QUERCUS PHELLOS)	G	G	G	F	G		TR	6	75%	75%			
5	8	WILLOW OAK (QUERCUS PHELLOS)	G	G	G	G	G	PROXIMITY TO UNDERGROUND VAULT	TR	8	75%	75%			
6	7	WILLOW OAK (QUERCUS PHELLOS)	G	G	G	F	G	FUNGUS PRESENT AT BASE OF TRUNK (SE)	R	43	75%	75%	24.1875	5	
7	10	WILLOW OAK (QUERCUS PHELLOS)	G	G	G	G	G	CABLED	R	40	75%	75%	22.5	6	
8	9	WILLOW OAK (QUERCUS PHELLOS)	F	G	G	G	G		R	5	75%	75%	2.8125	1	
9	11	WILLOW OAK (QUERCUS PHELLOS)	G	G	G	G	G	CABLED	R	37	75%	75%	20.8125	5	
10	12	WILLOW OAK (QUERCUS PHELLOS)	G	G	F	F	F	BURL AT BASE OF TRUNK, CABLED	R	36	75%	50%	14.25	3	
11	13	WILLOW OAK (QUERCUS PHELLOS)	G	G	G	G	G	CABLED, SLIGHT LEAN	S	40	75%	75%			
12	4	WILLOW OAK (QUERCUS PHELLOS)	G	G	G	G	G	LEMB UP, CO-DOMINANT LEADER	S	6	75%	75%			
13	3	WILLOW OAK (QUERCUS PHELLOS)	F	F	F	G	F	CABLED	S	38	75%	50%			
14		REMOVED							N/A						
15	2	WILLOW OAK (QUERCUS PHELLOS)	G	G	G	G	G		S	4	75%	75%			
16		REMOVED							N/A						
17	S11	WILLOW OAK (QUERCUS PHELLOS)	P	F	P	F	P	NPS POTENTIAL REMOVAL LIST, CHLOROTIC, LEANING	R	12	75%	25%	2.25	1	
18	S10	REMOVED							N/A						
19	B9	WILLOW OAK (QUERCUS PHELLOS)	F	F	G	F	F	SPARSE, HIGH ROOT BALL	S	7	75%	50%			
20	B8	WILLOW OAK (QUERCUS PHELLOS)	F	G	F	F	F	TRUNK DAMAGE EVIDENT	S	10	75%	50%			
21	B7	WILLOW OAK (QUERCUS PHELLOS)	P	P	P	F	P	CHLOROTIC	S	4	75%	25%			
22	B6	REMOVED							N/A						
23	B5	WILLOW OAK (QUERCUS PHELLOS)	P	P	F	F	P	CHLOROTIC	S	8	75%	25%			
24	B4	WILLOW OAK (QUERCUS PHELLOS)	P	P	F	F	P	CHLOROTIC	S	9	75%	25%			
25	B3	WILLOW OAK (QUERCUS PHELLOS)	P	P	F	P	P	GIRDLING ROOTS PRESENT, CHLOROTIC	S	9	75%	25%			
26	B2	WILLOW OAK (QUERCUS PHELLOS)	P	P	F	F	P	CHLOROTIC	S	12	75%	25%			
27	S1	WILLOW OAK (QUERCUS PHELLOS)	F	P	F	F	F	SUCKERING, CHLOROTIC	S	8	75%	50%			
SPECIES RATING IS THE AVERAGE OF THE RATING RANGE AS IDENTIFIED BY THE MID-ATLANTI CHAPTER OF ISA RATINGS 2021 GUIDELINES															
CONDITION RATING ASSUMPTION SIMPLIFIED TO: POOR = 25%, FAIR = 50%, GOOD = 75%															
NUMBER OF TREES AT 2.5" CALIPER DBH REQUIRED FOR MITIGATION (SHERMAN PARK)														23	
EAST EXECUTIVE DRIVE TREE															
E1		WILLOW OAK (QUERCUS PHELLOS)							R	18	75%	75%	10.125	3	
E2		WILLOW OAK (QUERCUS PHELLOS)							R	24	75%	75%	13.5	3	
E3		WILLOW OAK (QUERCUS PHELLOS)							R	5	75%	75%		1	
E4		SAUCER MAGNOLIA (MAGNOLIA X SOULANGEANA)							R	6	70%	75%		1	
E5		WILLOW OAK (QUERCUS PHELLOS)							R	6	75%	75%		1	
E6		SAUCER MAGNOLIA (MAGNOLIA X SOULANGEANA)							R	4	70%	75%		1	
E7		ALLEGHENY SERVICEBERRY (AMELANCHIER LAEVIS)							R	2	80%	75%		1	
E8		ALLEGHENY SERVICEBERRY (AMELANCHIER LAEVIS)							R	3	80%	75%		1	
E9		WILLOW OAK (QUERCUS PHELLOS)							R	6	75%	75%		1	
E10		KOUSSA DOGWOOD (CORNUS KOUSSA)							R	2	88%	75%	12.6	1	
E11		SOUTHERN MAGNOLIA (MAGNOLIA GRANDIFOLIA)							R	24	70%	75%		3	
NUMBER OF TREES AT 2.5" CALIPER DBH REQUIRED FOR MITIGATION (EAST EXECUTIVE)														17	
TOTAL NUMBER OF TREES REQUIRED FOR MITIGATION															40

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY


The proposed landscape plan identifies all new trees, plantings, and grass areas planned within the scope of this project. Plantings around existing and new site walls will be selected and coordinated with NPS to provide a cohesive design that includes all 4 sides of the monument.

The proposed Entrance Pavilion is sited along the western most edge of the park where the quadrant is significantly wider than the north, south, and east sides. The east façade of the building is aligned to match the distance between the monument and existing retaining wall along 15th Street on the opposite side.

Trees are proposed along lower East Executive Avenue within the sidewalk similar to the existing trees along 15th Street. These will provide a landscape buffer between parking and the west face of the pavilion.

The landscape design for the west side of East Executive Avenue across from the proposed exit building (location of existing temporary trailers) will be provided as part of the adjacent East Wing project.

The existing historic pathways and retaining walls at each corner of the park will remain in the finished site condition; however, the northwest and southwest pathways will need to be removed and rebuilt for construction of the Entrance Pavilion's underground facilities. Additionally, steps will be integrated into the rebuilt southwest pathway to clear the below-grade portion of the proposed structure.

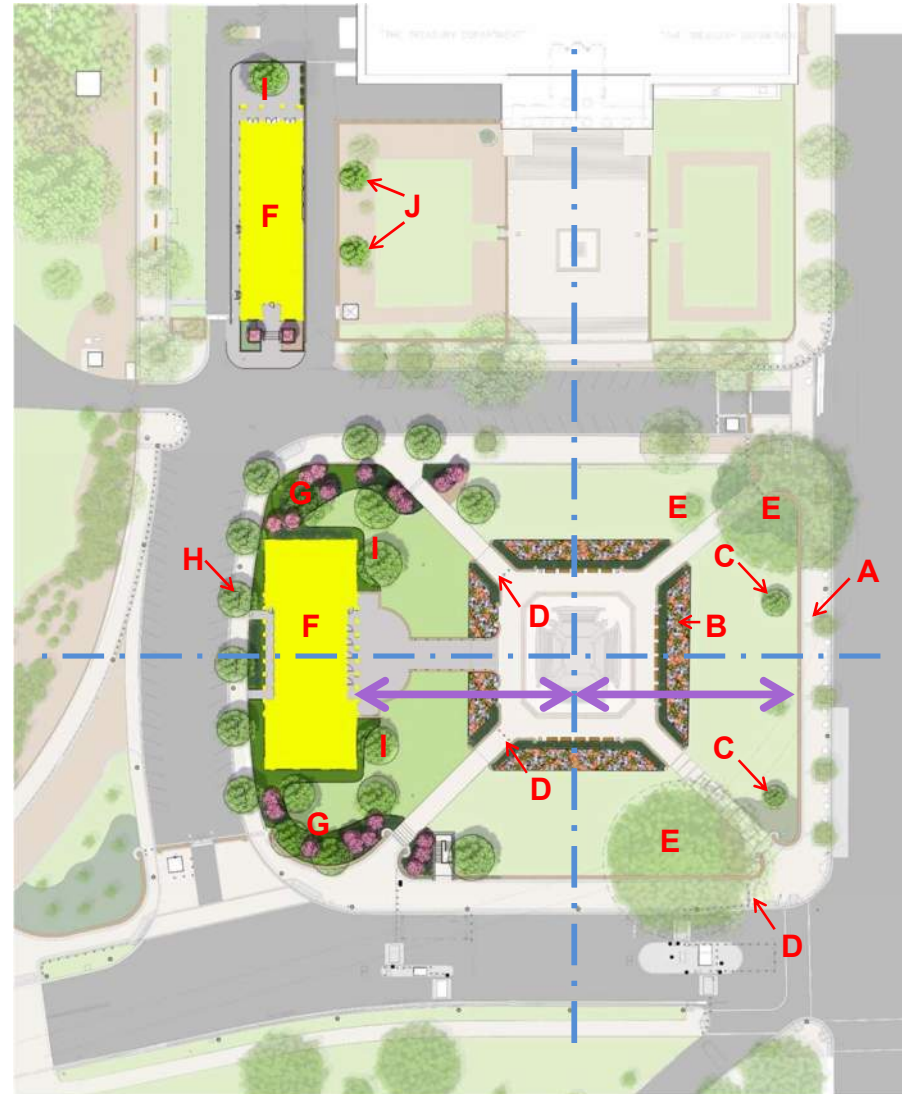

PLAN VIEW: PROPOSED LANDSCAPE PLAN

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

The plant schedule has been under development with consultation with NPS. NPS has expressed the desire to keep the park as a stand of Willow Oak, as has been the case historically. The addition of understory trees helps with the screening of parking along East Executive Drive and contributes to the required tree replacement requirement.

The proposed number of trees satisfies the NCPC tree replacement requirements. Tree sizes are specified larger than the minimum requirements to establish a more mature landscape for the project at the end of construction.

PLANT SCHEDULE

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE	ROOT	SPACING	NOTES
CANOPY TREES							
QP1	9	QUERCUS PHELLOS	WILLOW OAK	3" CAL.	B&B	AS SHOWN	STRONG CENTRAL LEADER, LIMBED TO 6'
QP2	6	QUERCUS PHELLOS	WILLOW OAK	5" CAL.	B&B	AS SHOWN	STRONG CENTRAL LEADER, LIMBED TO 6'
QP3	3	QUERCUS PHELLOS	WILLOW OAK	8" CAL.	B&B	AS SHOWN	STRONG CENTRAL LEADER, LIMBED TO 6'
UA	1	ULMUS AMERICANA 'PRINCETON'	PRINCETON ELM	6" CAL.	B&B	AS SHOWN	STRONG CENTRAL LEADER, LIMBED TO 6'
ORNAMENTAL TREES							
AL	11	AMELANCHIER LAEVIS	ALLEGHENY SERVICEBERRY	12' HT.	B&B	AS SHOWN	FULL PLANT
CF	14	CORNUS FLORIDA	FLOWERING DOGWOOD	12' HT.	B&B	AS SHOWN	FULL PLANT
SHRUBS							
IC	--	ILEX CRENATA 'COMPACTA'	COMPACT JAPANESE HOLLY	#7	CONT.	AS SHOWN	FULL PLANT
MP	--	MYRICA CERIFERA	SOUTHERN BAYBERRY	#7	CONT.	AS SHOWN	FULL PLANT
RDB	--	RHODODENDRON KURUME DE VALLEY WHITE'	AZALEA - WHITE	#7	CONT.	AS SHOWN	FULL PLANT
RDD	--	RHODODENDRON KURUME 'BLAAVUS PINK'	AZALEA - PINK	#7	CONT.	AS SHOWN	FULL PLANT
RM	--	RHODODENDRON CATABIENSE	CATAWBA RHODODENDRON	#7	CONT.	AS SHOWN	FULL PLANT
PERENNIAL & GROUNDCOVERS							
CP	--	CAREX PENNSYLVANICA	PENNSYLVANIA SEDGE	#1	CONT.	18" O.C.	FULL PLANT
CV	--	CHRYSOSONUM VIRGINIANUM	GREEN AND GOLD	#1	CONT.	18" O.C.	FULL PLANT
PS	--	PHLOX SUBULATA	MOSS PHLOX	#1	CONT.	2' O.C.	FULL PLANT
PV	--	PANICUM VIRGATUM 'SHENANDOAH'	SHENANDOAH SWITCH GRASS	#1	CONT.	2' O.C.	FULL PLANT
BULBS AND EPHEMERALS							
ca	--	CROCUS AUTUMNALIS	AUTUMN CROCUS	TOP SIZE	BULB	6-8" O.C.	
df	--	DAFFODIL SPECIES	DAFFODIL	TOP SIZE	BULB	6-12" O.C.	
mv	--	MERTENSIA VIRGINICA	VIRGINIA BLUEBELLS	LS PLUG	PLUG	18" O.C.	FULL PLANT


2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED SITE MATERIALS

The northwest and southwest walkways radiating from the pedestal of the General Sherman statue will be defined and isolated with cast iron post-and-chain bollards. These walkways will feature decorative concrete paving to match the existing concrete in this location, the radiating walkways extending to the northeast and southeast, and the walkway surrounding the pedestal. Stairs within the radiating walkways will be stone, providing a materiality consistent with adjacent site elements. Annuals will be planted around the perimeter of the walkway surrounding the pedestal; these seasonal plantings will provide color, soften hardscape edges, and visually frame the monument area.

The walkway and plaza linking the Sherman statue to the Entrance Pavillion will be paved with decorative stone. Additionally, stone seat walls will separate the walkways, planting beds, and turf, clarifying the entry procession. The seat walls' geometry and materiality will complement the stone paving and the Entrance Pavillion façade. Along the western perimeter, walkways will be precast pavers selected to match existing perimeter paving. A stone curb will separate the western walkway from the adjacent plantings along the Entrance Pavillion.

The walkways surrounding the Staff Screening / Exit Building, along with the stairs and ramp leading to it, will receive a decorative stone paving similar to the installation at the Entrance Pavillion. This will provide consistent character in high-use areas and at key thresholds.

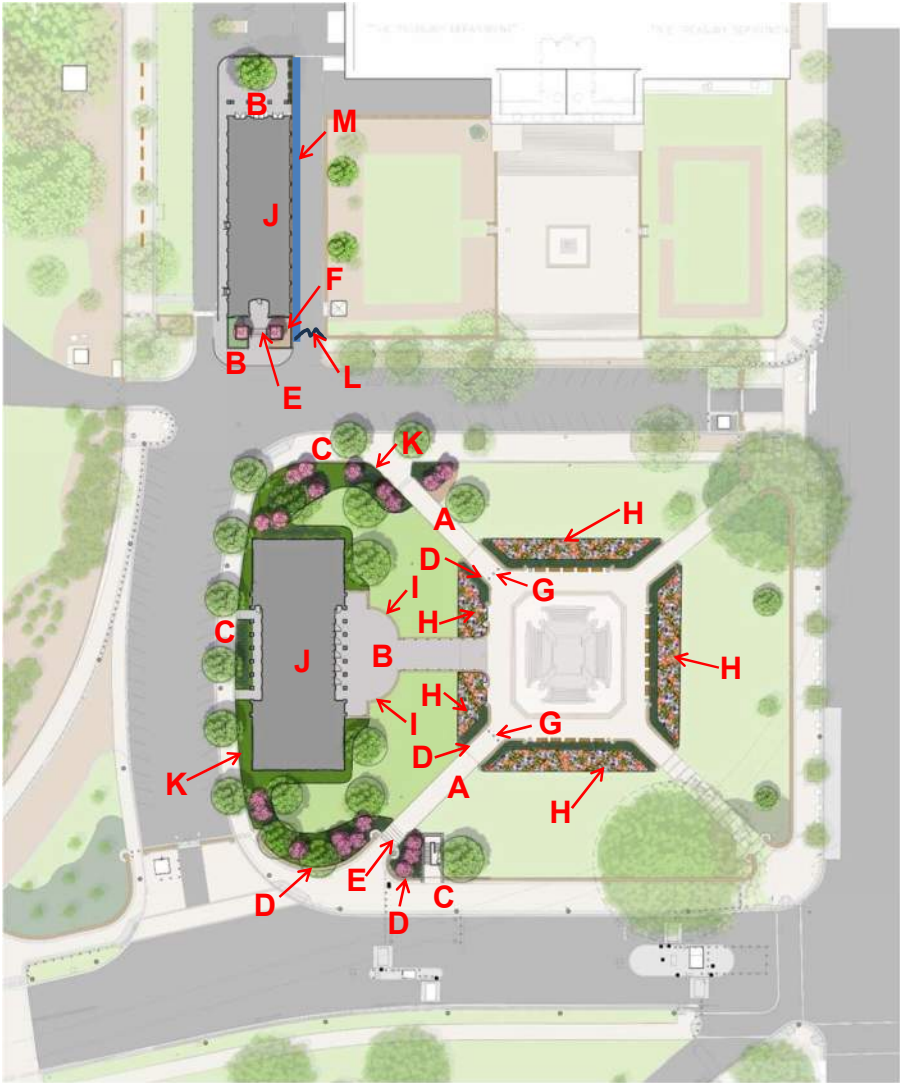

- A. DECORATIVE CONCRETE PAVING TO MATCH EXISTING
- B. STONE PAVING
- C. PRECAST PAVER SIDEWALK TO MATCH EXISTING
- D. STONE SITE WALLS TO MATCH EXISTING
- E. STONE SITE STAIRS
- F. STONE PAVED RAMP
- G. POST & CHAIN BOLLARDS
- H. ANNUALS BED
- I. STONE SEAT WALLS
- J. PROPOSED BUILDING
- K. PARK STONE CURBING TO MATCH EXISTING
- L. RECONFIGURE HISTORIC GATE
- M. CLAD PROPOSED RETAINING WALL WITH SALVAGED STONE VENEER

PLAN VIEW: PROPOSED LANDSCAPE PLAN

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

Visitors to the White House will be instructed to arrive at the west side of Sherman Monument from either Hamilton Place and 15th Street or E Street and 15th Street corners of the park.


Queuing will begin in the plaza at the center of the park. Visitors will enter the facility via a new walkway on axis with the monument. An above-ground entrance pavilion, located in the western quadrant of the park, will provide indoor queuing, pre-function space, secret service support, building support, and symmetrical stairs and elevators to descend to the screening area below.

The proposed entrance pavilion preserves key public viewsheds of the monument and the Treasury while providing a dignified central entry point to the White House from the park and Pennsylvania Avenue.

Badged staff and contractors will enter via an above-grade screening post integrated into a new 4,000 square foot building along East Executive Avenue. The north side of this building will also enclose the escalators from the below-grade program, serving as the exit point from the facility into the cleared side of the campus.

A stairwell located at the south quadrant of the park, will function as a badged access point for USSS and facility personnel, as well as an emergency egress from the below-grade building.

The monument at the center of the park will be protected in place. Upon completion of the project, the park will remain open to the public and accessible from the northeast and southeast pathways from 15th Street Alexander Hamilton Place and E Street located north and south of the site respectively will remain restricted to authorized vehicles and pedestrians.

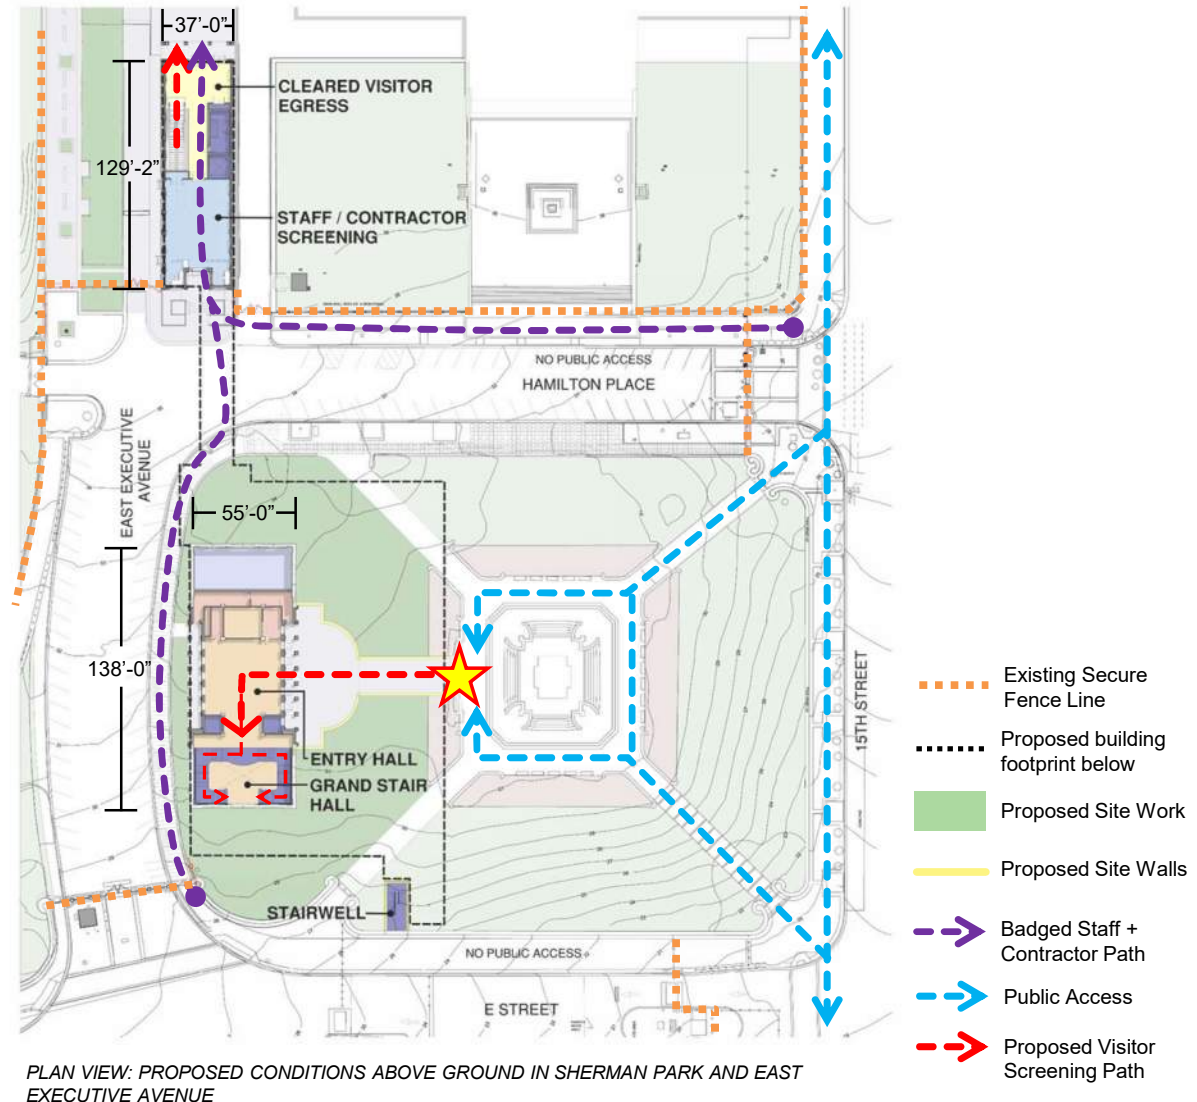

2. WHITE HOUSE VISITOR SCREENING FACILITY


2.2 PROPOSED FACILITY

Upon entering the below-grade portion of the facility, visitors will process through pre-screening and primary screening.

Once visitors have completed primary screening, they proceed through a tunnel where the Executive Office of the President (EOP) and the tour office may provide informational displays to enhance the visitor experience. Escalators then return visitors to grade level north of the secure fence line along East Executive Avenue. From there, visitors continue to their scheduled White House tour or event.

The visitor screening facility is approximately 33,000 square feet and will include the necessary security procedures, technology and support space to meet the USSS protective mission for screening all visitors entering the White House.

The primary screening area is sized to accommodate the equipment and spatial requirements necessary to achieve the throughput capacities established by USSS for large events. The space is organized as an open floor plan to provide maximum flexibility with 6 lanes to accommodate current screening processes and equipment, and to support adaptation to evolving screening technologies and capabilities.

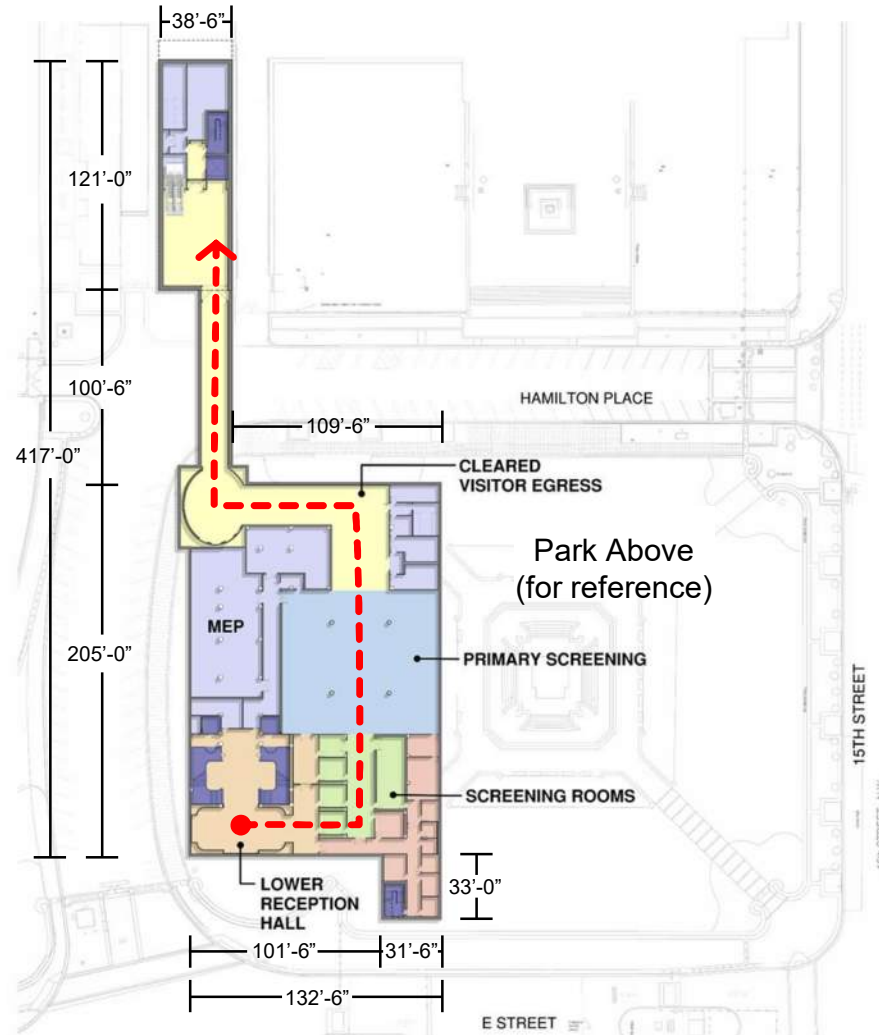

PLAN VIEW: PROPOSED CONDITIONS BELOW SHERMAN PARK AND EAST EXECUTIVE AVENUE

 Proposed Visitor Screening Path

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

The entrance pavilion is conceived as a classically inspired composition that reinforces the formal character and significance of the site. A rhythmic colonnade of ten columns supports a carefully proportioned entablature and balustrade, creating a dignified architectural presence.

The composition is aligned on axis of the Sherman Monument, establishing a strong visual relationship between the new structure and the surrounding historic landscape while emphasizing procession, order, and monumentality.


To further define the entry and facade, the doors are recessed behind the primary colonnade. Pilasters positioned between the door openings continue the cadence and proportions established by the exterior columns, creating a seamless architectural language across the façade which provides visual depth and shadow.

The pavilion and corresponding exit building are unified through the use of Sierra White granite, selected for its durability, timeless appearance, and compatibility with the surrounding granite of the park.

Presidential seals, carved into the granite panels flanking the colonnade, serve as a visual expression of the building's purpose.



SOUTHEAST CORNER OF ENTRANCE PAVILION WITHIN SHERMAN PARK



2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY



SOUTHEAST CORNER OF ENTRANCE PAVILION WITHIN SHERMAN PARK

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY



VISITOR APPROACH TO ENTRANCE PAVILION FROM SHERMAN MONUMENT PLAZA

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY



VIEW FROM THE CORNER OF E STREET NW AND 15TH STREET NW

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY



VIEW FROM VISITOR ENTRANCE TO SHERMAN PARK AT HAMILTON PLACE AND 15TH STREET NW

2. WHITE HOUSE VISITOR SCREENING FACILITY


2.2 PROPOSED FACILITY




VIEW FROM EAST EXECUTIVE AVENUE

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

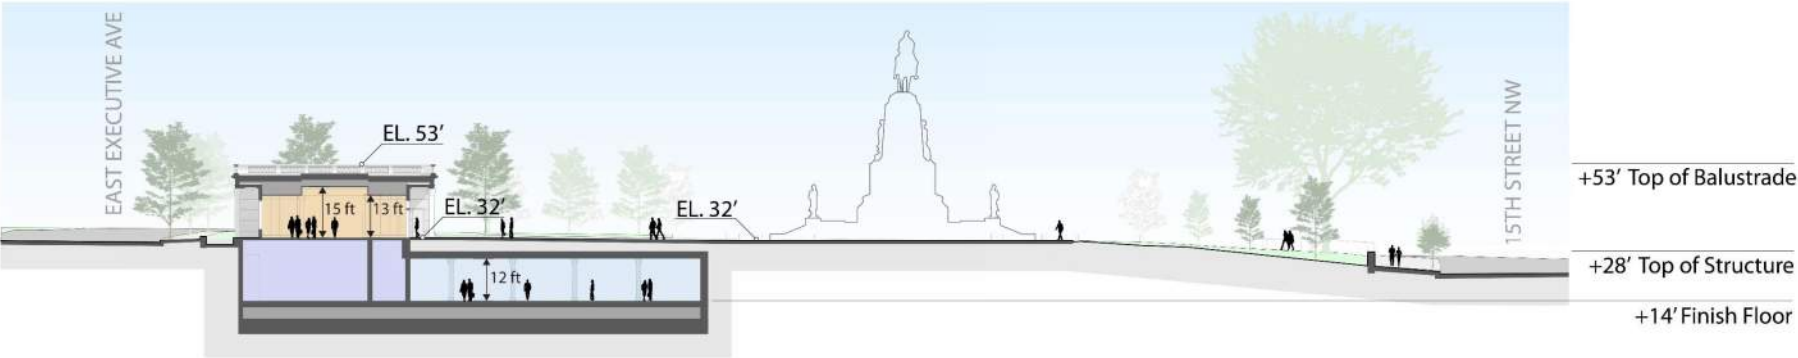

1 ENTRY HALL+ LOWER LEVEL SCREENING

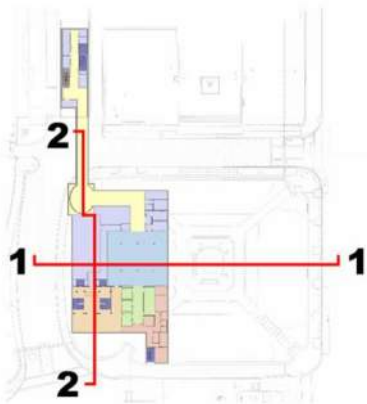


LEGEND – SECTION CUT LOCATIONS




2 VISITOR FLOW TO LOWER LEVEL SCREENING

DIAGRAMMATIC SECTIONS SHOWING THE FACILITY UNDERNEATH SHERMAN PARK'S WEST QUADRANT

2.2 PROPOSED FACILITY

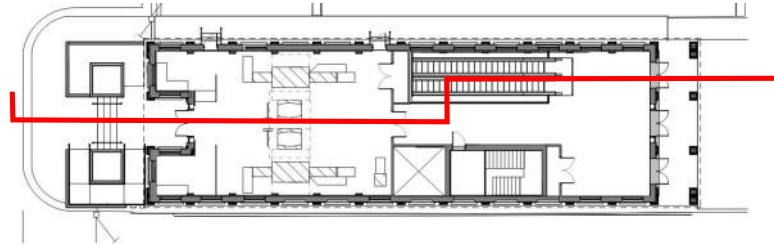


ENLARGED FLOOR PLAN AT GRADE

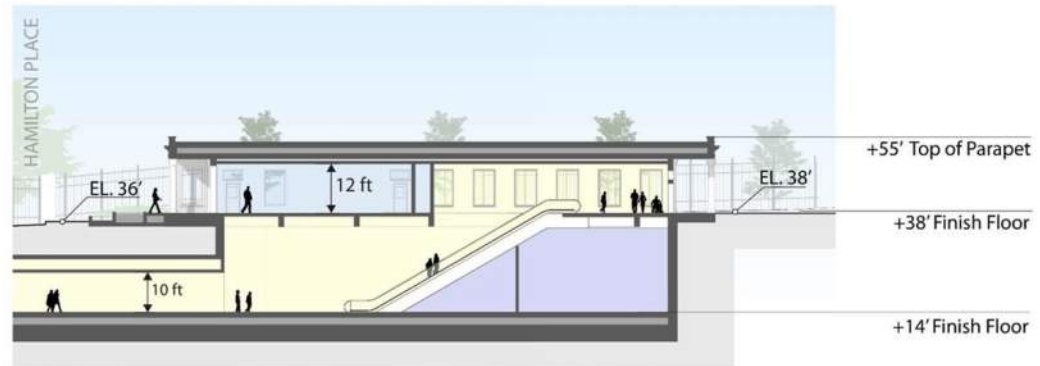

3 STAFF SCREENING AND EXIT BUILDING

DIAGRAMMATIC SECTION SHOWING THE ABOVE-GRADE SCREENING AND CLEARED VISITOR EGRESS

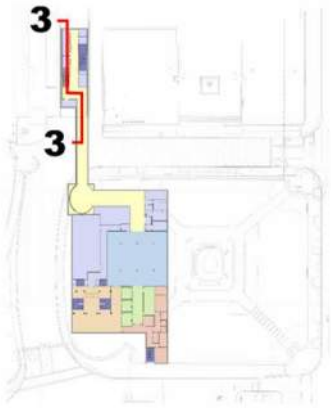

LEGEND – SECTION CUT LOCATIONS

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY


The architectural design of the staff screening and exit building incorporates freestanding columns at the north entrance, engaged columns in the balance of the building, and a flat roof articulated with a classically detailed entablature.

The parapet has been simplified to enhance the prominence of the adjacent entrance pavilion within the park, while the continued use of Sierra White granite strengthens the visual relationship between the two buildings.

Continuous pilaster elements establish a rhythmic order across the east and west facades, accommodating glazed openings where appropriate and solid infill panels as required. Glazing systems are detailed using traditional moldings and trim consistent with the project's classical character.



VIEW OF STAFF SCREENING / EXIT BUILDING FROM THE SOUTH



2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY



VIEW OF STAFF SCREENING / EXIT BUILDING FROM THE SOUTHWEST

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY



VIEW OF STAFF SCREENING / EXIT BUILDING FROM THE NORTHWEST

2. WHITE HOUSE VISITOR SCREENING FACILITY



2.2 PROPOSED FACILITY



VIEW OF STAFF SCREENING / EXIT BUILDING FROM THE TREASURY BUILDING

2. WHITE HOUSE VISITOR SCREENING FACILITY


2.2 PROPOSED FACILITY

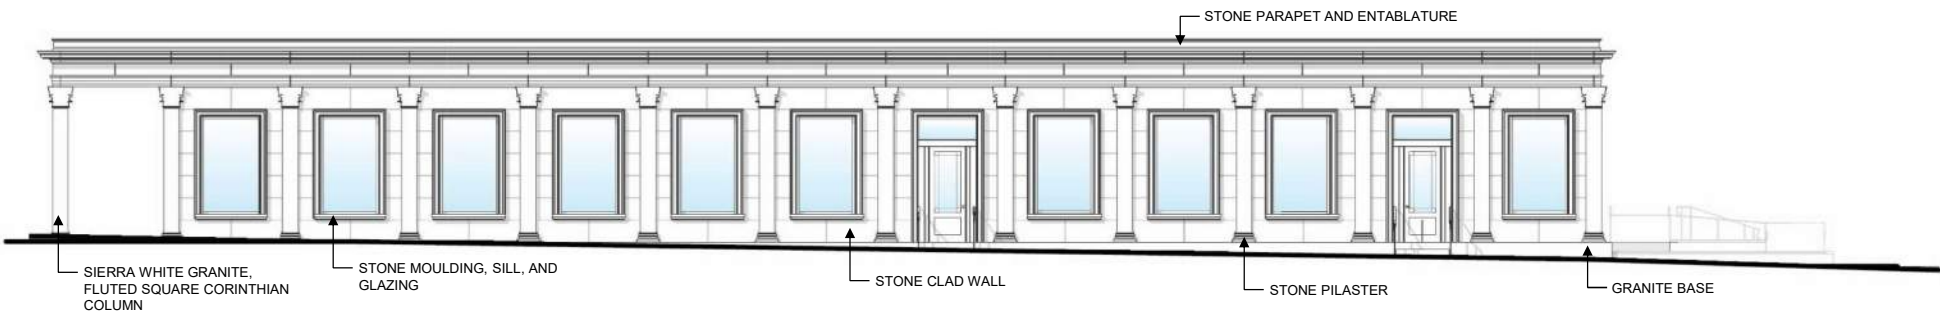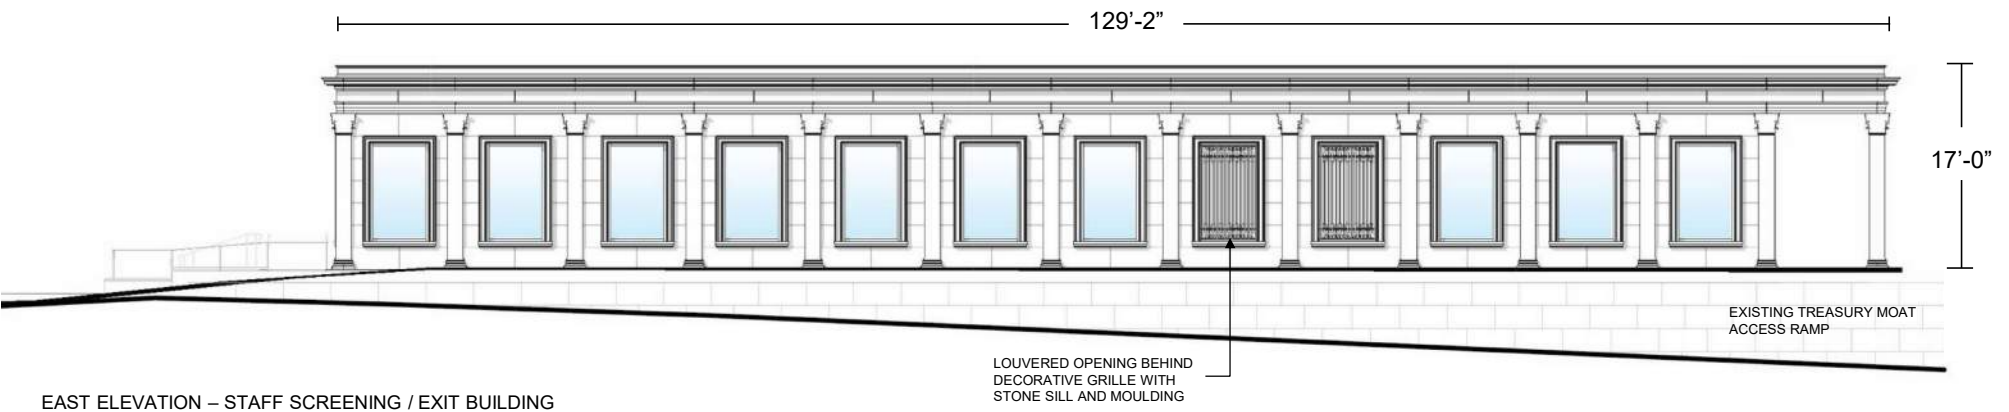


OVERALL HEIGHT: 17'-0"
COLUMN HEIGHT: 13'-0"
OVERALL LENGTH: 129'-2"
OVERALL WIDTH: 37'-0"
ELEVATION LOW POINT: 36'-0"
ELEVATION HIGH POINT: 38'-0"

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

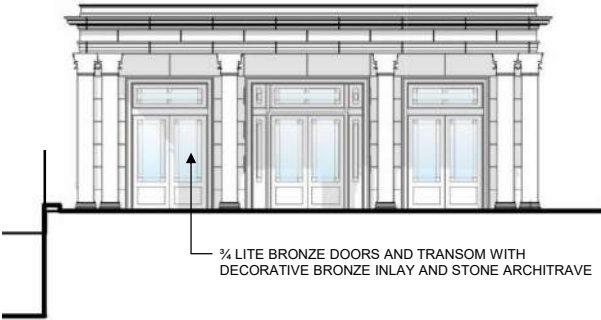

NORTH ELEVATION – STAFF SCREENING / EXIT BUILDING

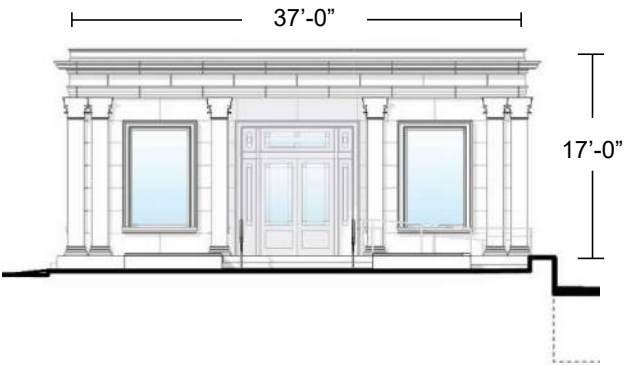

SOUTH ELEVATION – STAFF SCREENING / EXIT BUILDING


OVERALL HEIGHT: 17'-0"
COLUMN HEIGHT: 13'-0"

OVERALL LENGTH: 129'-2"
OVERALL WIDTH: 37'-0"


ELEVATION LOW POINT: 36'-0"
ELEVATION HIGH POINT: 38'-0"

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

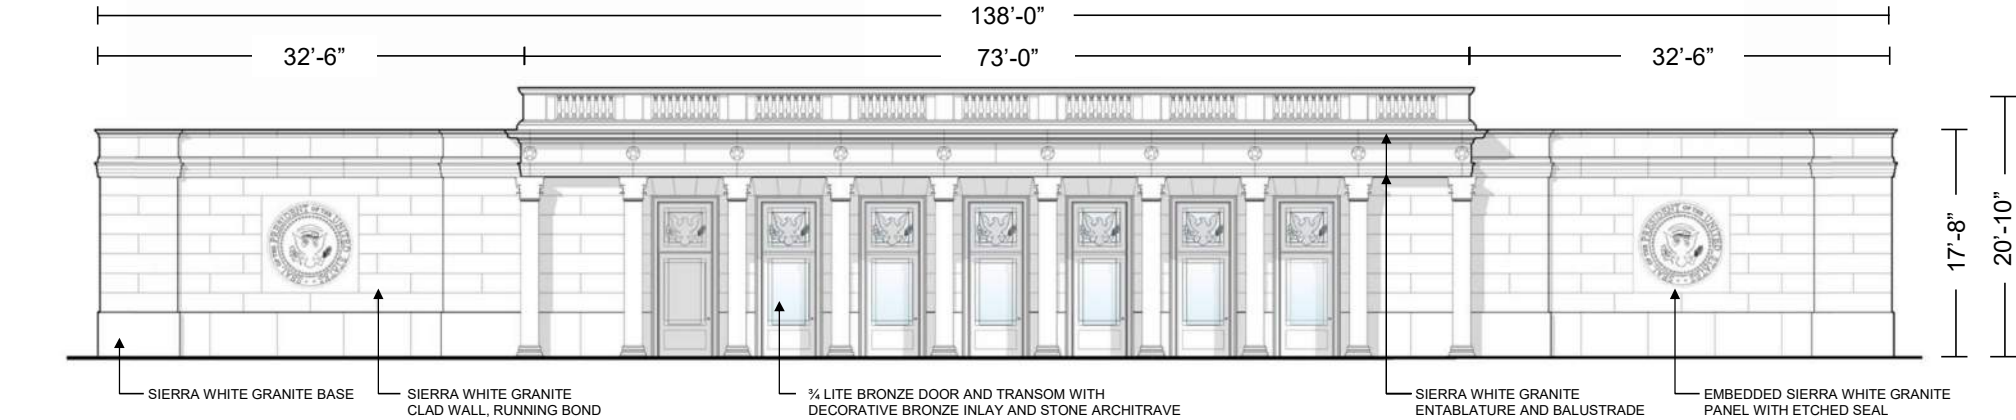

EAST ELEVATION - ENTRANCE PAVILION

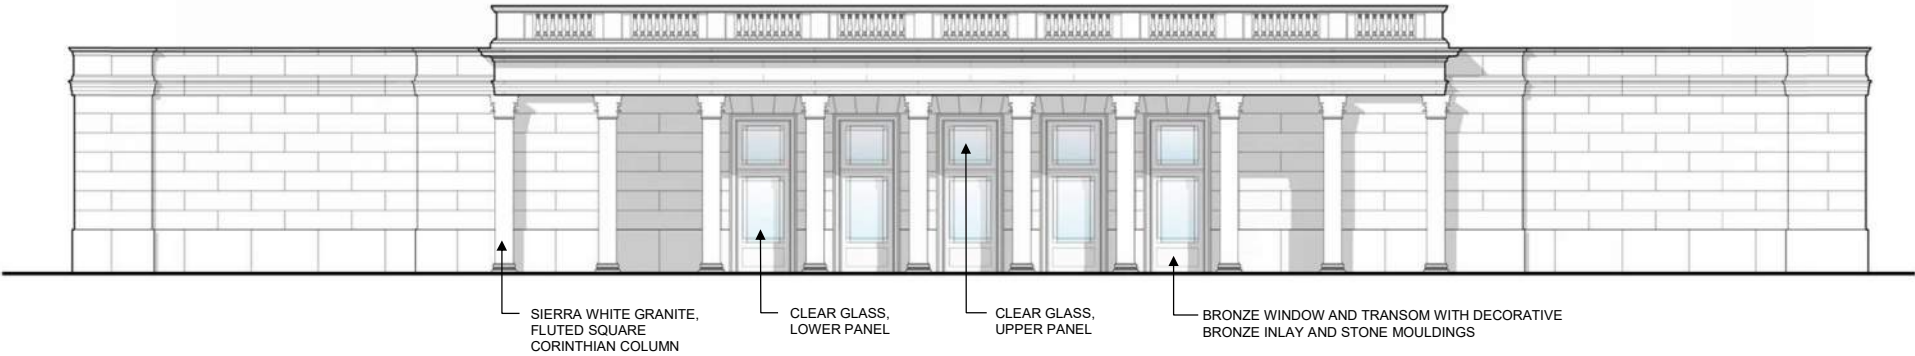


WEST ELEVATION - ENTRANCE PAVILION

OVERALL HEIGHT: 20'-10"
COLUMN HEIGHT: 14'-0"

OVERALL LENGTH: 137'-0"
OVERALL WIDTH: 55'-0"

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

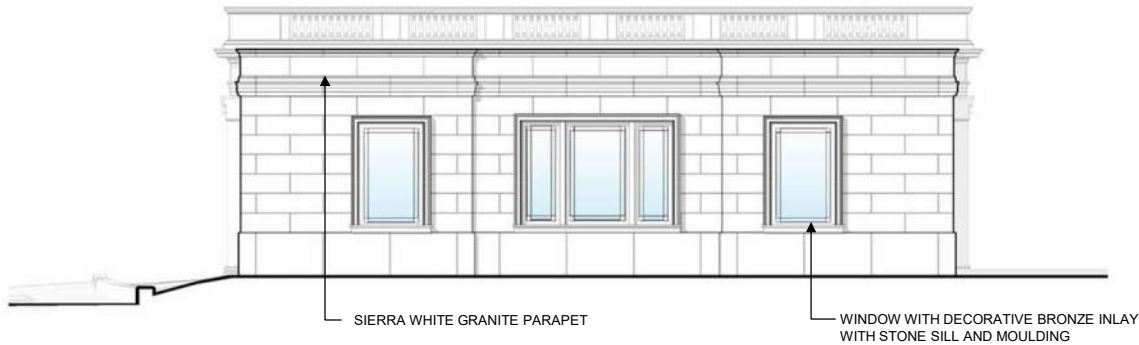

SOUTH ELEVATION - ENTRANCE PAVILION



NORTH ELEVATION - ENTRANCE PAVILION

OVERALL HEIGHT: 20'-10"
COLUMN HEIGHT: 14'-0"


OVERALL LENGTH: 137'-0"
OVERALL WIDTH: 55'-0"

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY




SITE ELEVATION OF WEST FACADES

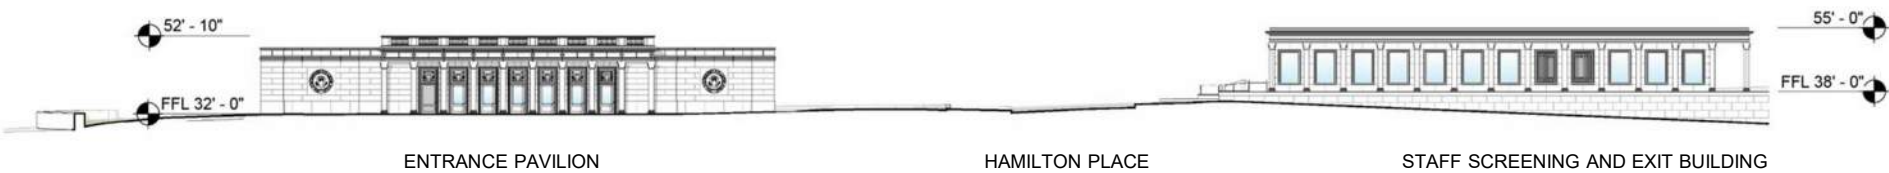


SITE ELEVATION OF EAST FACADES

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

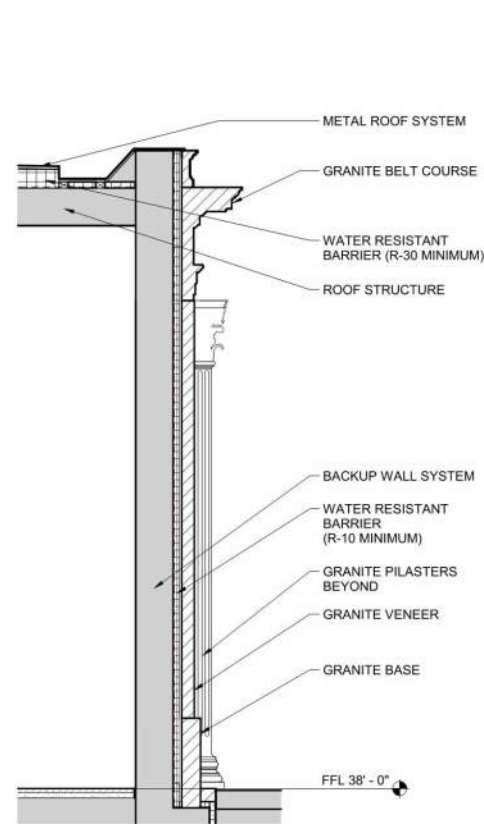

STAFF SCREENING AND EXIT BUILDING

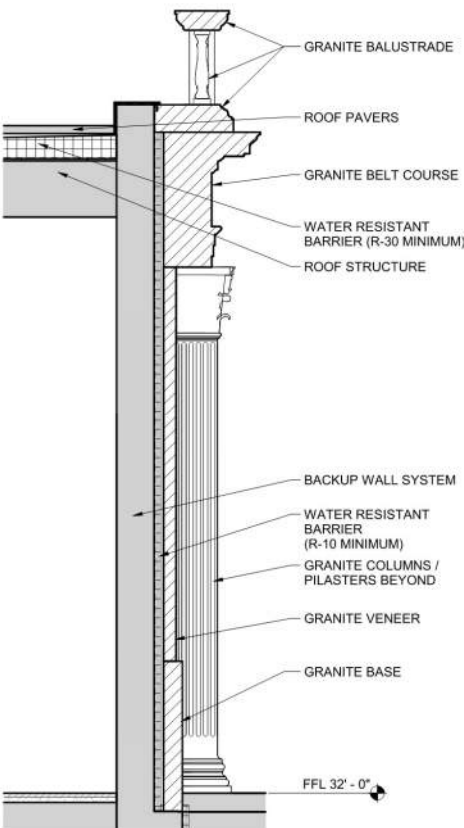


ENTRANCE PAVILION

TYPICAL WALL SECTIONS

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.2 PROPOSED FACILITY

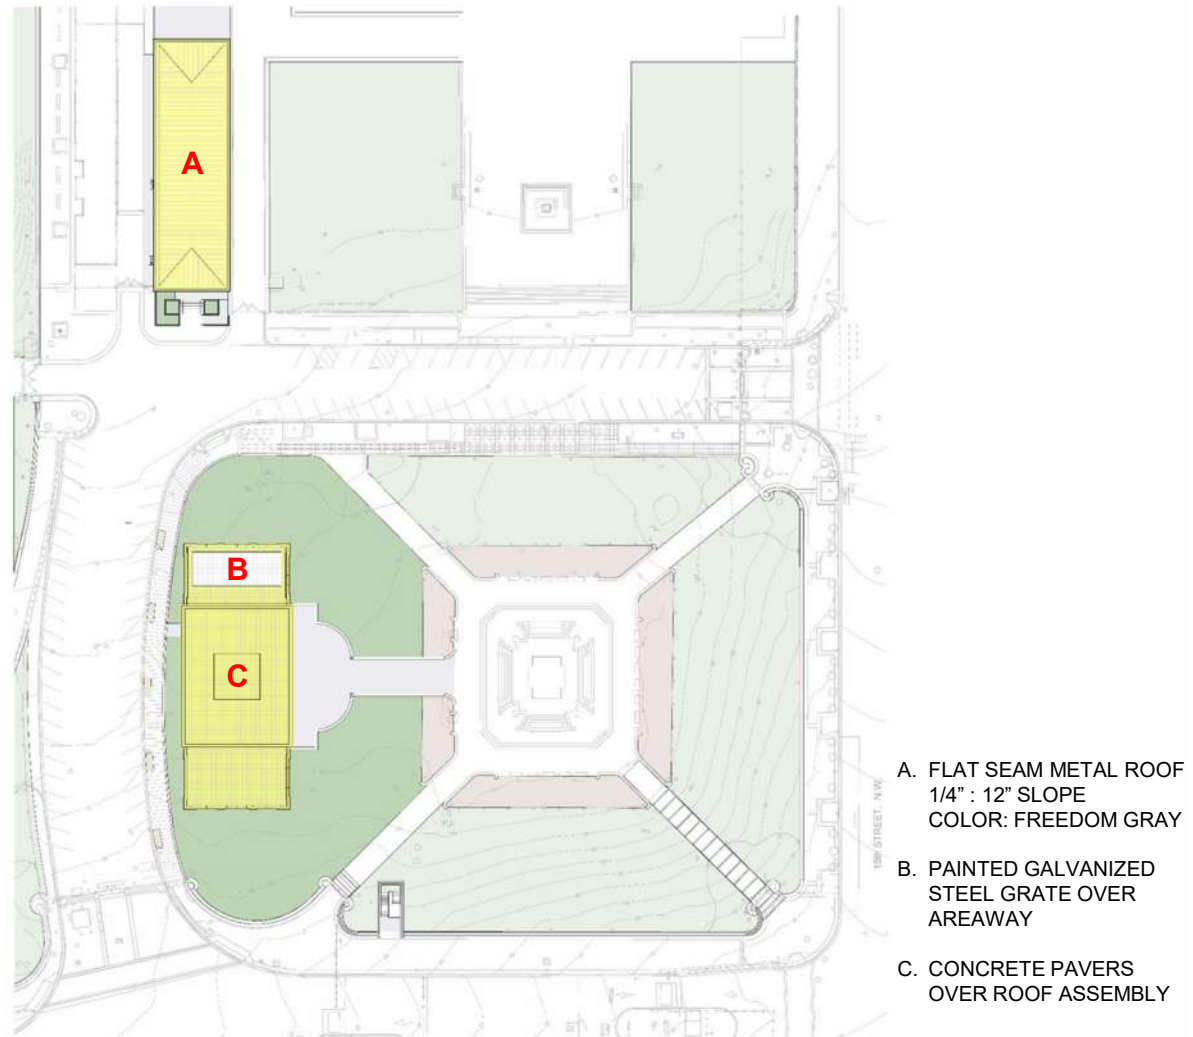

ROOF PLAN: ENTRANCE PAVILION + STAFF SCREENING / EXIT BUILDING

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.3 ALTERNATIVE LOCATIONS

Lily Triangle / Below East Exec and E Street

- o Larger footprint
- o Disruption to Campus operations during construction
- o Entrance located within outer secure perimeter at E Street

North Treasury - Below Ground Plaza / Partial Courtyard Infill

- o Major utility conflicts
- o Fewer screen lanes possible
- o Aesthetic change to front entry of Treasury
- o Staff and Visitors share lanes

Sherman Park - Below Ground Facility - North Entry Plaza

- o Substantial excavation and ramping required to reach depth.
- o Circulation pinch point complicating flow and operational efficiency.
- o Potential Treasury archeological site in North side of Park.

Sherman Park - Below Ground Facility - East Entry Plaza

- o Three quadrants of the park would be affected
- o Large sewer tunnel traversing the southeast quadrant of the park impedes on below grade access.
- o Additional below grade square footage required to reach primary screening area under west side.




Sherman Park - Above Ground

- o Highly visible from the park and the surrounding public spaces.
- o Complete removal of existing trees with no available space to introduce replacement plantings.
- o Entrance located within outer secure perimeter at E Street and park
- o Cleared visitors would exit into Sherman Park, which remains south of the secondary secure fence line.
- o Additional USSS personnel required to monitor cleared visitor after screening

South Treasury - Below Ground Facility

- o Construction would require the removal of the historic fence and plaza
- o The entry would be highly visible, affecting view of Treasury
- o Overflow visitors would queue along the 15th Street sidewalks with entry inside current security perimeter.
- o Subterranean conflicts with existing utilities, requires structural underpinning

The proposed location for the Visitor Screening Facility at Sherman Park was strategically selected with consideration to multiple factors including, but not limited to security, functionality, visitor flow, aesthetics, and cost. Siting the facility was performed in a manner to mitigate the permanent impact to the surrounding areas as much as possible. Alternate locations around the complex have been considered extensively.

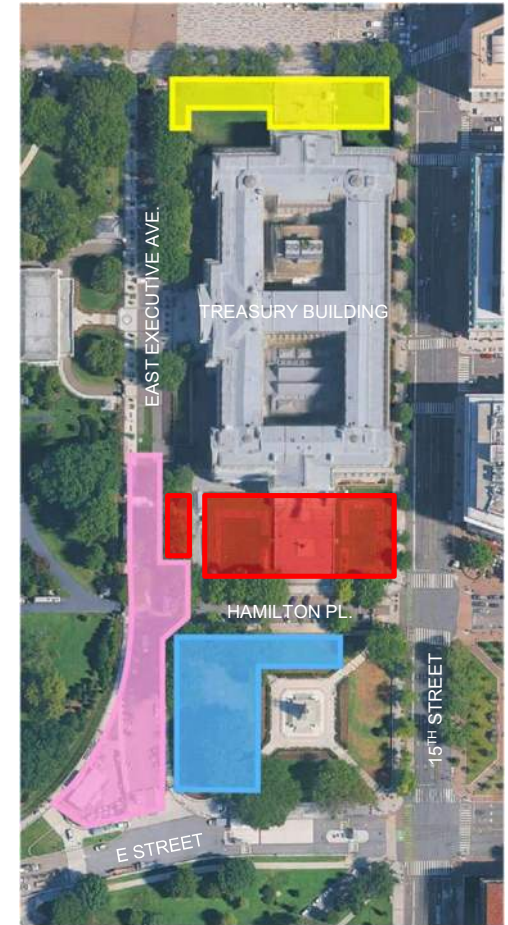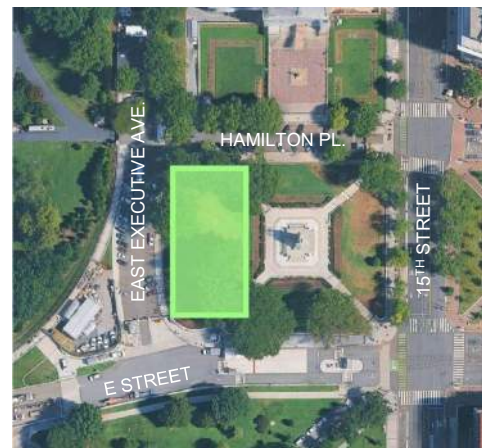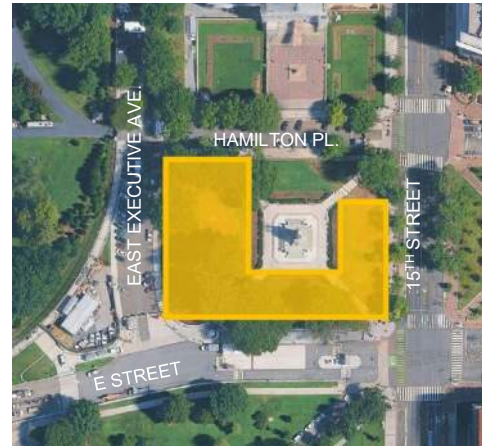



SCREENING FACILITY ALTERNATIVES

2. WHITE HOUSE VISITOR SCREENING FACILITY

2.3 ALTERNATIVE LOCATIONS

Sherman Park - Below Ground Facility - South Entry Plaza

- Existing sewer tunnel conflict was found to be greater than anticipated after comprehensive field surveys.
- Proposed plaza altered a majority of the historic south quadrant of the park.

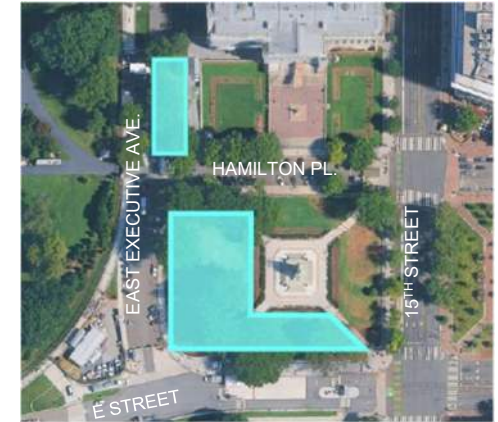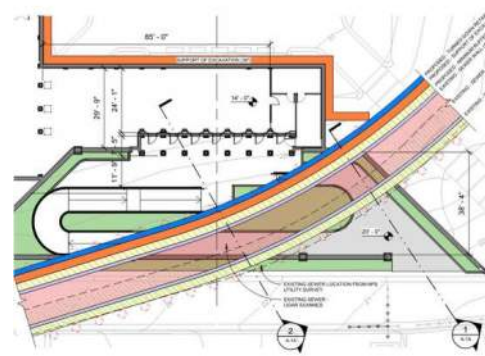

SCREENING FACILITY ALTERNATIVES